

## Generator set data sheet



**Model:** C900 D5  
**Frequency:** 50 Hz  
**Fuel type:** Diesel

<b>Spec sheet:</b>	<b>SS12-CPGK</b>
<b>Sound Data Sheet</b>	<b>MSP-3099</b>
<b>Cooling System Data</b>	<b>MCP-2046</b>

<b>Fuel consumption</b>	<b>Standby</b>				<b>Prime</b>			
	<b>kVA (kW)</b>				<b>kVA (kW)</b>			
Ratings	900 (720)				820 (656)			
Load	<b>1/4</b>	<b>1/2</b>	<b>3/4</b>	<b>Full</b>	<b>1/4</b>	<b>1/2</b>	<b>3/4</b>	<b>Full</b>
US gph	14.0	24.4	35.4	47.2	13.1	22.5	32.4	42.8
L/hr	53.2	92.5	134.0	178	49.6	85.1	122.5	162.0

<b>Engine</b>	<b>Standby rating</b>	<b>Prime rating</b>
Engine manufacturer	Cummins	
Engine model	QSK23-G3	
Configuration	Cast iron, in-line 6 cylinder	
Aspiration	Turbocharged and after-cooled	
Gross engine power output, kWm	768	701
BMEP at set rated load, kPa	2675	2441
Bore, mm	170	
Stroke, mm	170	
Rated speed, rpm	1500	
Piston speed, m/s	8.6	
Compression ratio	16:1	
Lube oil capacity, L	95	
Overspeed limit, rpm	1800 ±50	
Regenerative power, kW	72	
Governor type	Electronic	
Starting voltage	24 Volts DC	

<b>Fuel flow</b>	
Maximum fuel flow, L/hr	685
Maximum fuel inlet restriction, mm Hg	203
Maximum fuel inlet temperature, °C	70

Air	Standby rating	Prime rating
Combustion air, m <sup>3</sup> /min	53.30	48.70
Maximum air cleaner restriction, kPa	6.2	

Exhaust		
Exhaust gas flow at set rated load, m <sup>3</sup> /min	147.8	135.6
Exhaust gas temperature, °C	543	532
Maximum exhaust back pressure, kPa	10.1	

Standard set-mounted radiator cooling		
Ambient design, °C	40	
Fan load, kW <sub>m</sub>	16	
Coolant capacity (with radiator), L	89	
Cooling system air flow, m <sup>3</sup> /sec @ 12.7 mm H <sub>2</sub> O	11.6	11.6
Total heat rejection, Btu/min	20965	19196
Maximum cooling air flow static restriction mm H <sub>2</sub> O	25.4	25.4

Optional set-mounted radiator cooling		
Ambient design, °C	50	
Fan load, kW <sub>m</sub>	16	
Coolant capacity (with radiator), L	89	
Cooling system air flow, m <sup>3</sup> /sec @ 12.7 mm H <sub>2</sub> O	11.6	11.6
Total heat rejection, Btu/min	20965	19196
Maximum cooling air flow static restriction mm H <sub>2</sub> O	12.7	12.7


Weights*	Open	Enclosed
Unit dry weight kgs	6371	N/A
Unit wet weight kgs	6487	N/A

\* Weights represent a set with standard features. See outline drawing for weights of other configurations.


Dimensions	Length	Width	Height
Standard open set dimensions mm	4318	1856	2148
Enclosed set standard dimensions mm	N/A	N/A	N/A

## Genset outline

### Open set

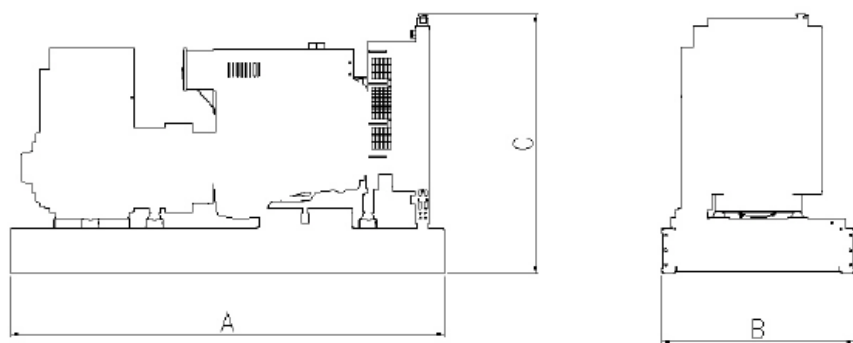

### Enclosed set

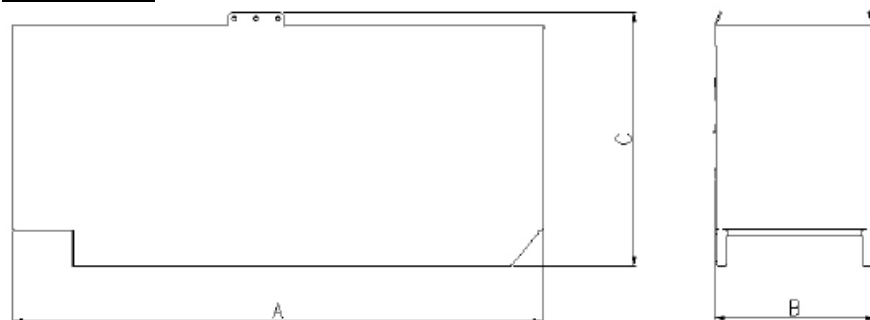

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

## Alternator data

Connection	Temp rise °C	Duty	Alternator	Voltage
Wye, 3-phase	150/125	S/P	HC6H	380-440 V

## Ratings definitions

Emergency Standby Power (ESP):	Limited-Time Running Power (LTP):	Prime Power (PRP):	Base Load (Continuous) Power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

## Formulas for calculating full load currents:

### Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

### Single phase output

$$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation  
Manston Park, Columbus Avenue  
Manston, Ramsgate  
Kent CT12 5BF, UK  
Telephone: +44 (0) 1843 255000  
Fax: +44 (0) 1843 255902  
E-mail: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
Web: [power.cummins.com](http://power.cummins.com)



**Our energy working for you.™**

©2018 Cummins Inc. All rights reserved.  
Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice.  
DS44g-CPGK A055S601 (09/18)

[power.cummins.com](http://power.cummins.com)